



PARTNER  
IN VENTILATION  
ZVVAIR.COM



# SAVANA 3

POWERFUL HEAT, MINIMAL ENERGY.

**SAVANA EC** offers a powerful and **efficient solution** for heating large spaces. Equipped with highly efficient and energy-saving **EC motors** and a powerful **water coils** that ensures reliable operation and excellent thermal output. Ideal for **industrial buildings, logistics centres, warehouses and sport facilities**.

## STANDARD VERSION



- ▶ Airflow from **1.700 to 7.000 m<sup>3</sup>/h**
- ▶ Available with **2-row or 3-row water coil**
- ▶ From **16,5 kW to 64,3 kW** (2-row, 80/60°C, inlet 15°C)

## INOX VERSION



- ▶ Airflow from **2.600 to 7.000 m<sup>3</sup>/h**
- ▶ Available with **2-row water coil**
- ▶ From **18,6 kW to 48,3 kW** (2-row, 80/60°C, inlet 15°C)

## FACE COVER OPTIONS



CUT-OUT  
LAMELLAS  
(INOX – C5)



ALUMINIUM  
LAMELLAS



ALUMINIUM  
LAMELLAS  
(VERTICAL)




EXHAUST  
JETS



DIFFUSOR


## INSTALLATION

**Wall-mounting brackets** fit all fan heater sizes and provide a simple, universal mounting solution (RAL 9016 or C5). They allow **15°** or **30°** angled installation to direct airflow. **Built-in rear threaded nuts** enable direct **ceiling mounting** with **threaded bars**.

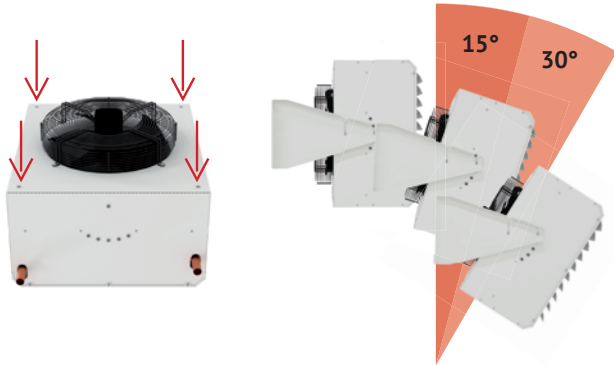

## AIR FILTER

The filter features a **G2 filtration class** and allows for **quick and simple replacement**. A **visual clogging indicator** makes it easy to monitor filter condition and maintain optimal performance.

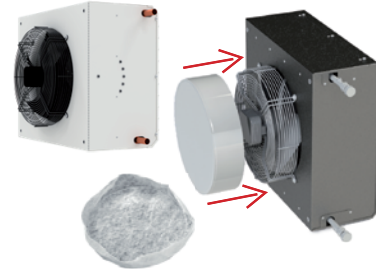

## IC PRIME EC CONTROL

**AirGENIO PRIME** is an intelligent, **fully automatic** control unit for **2VW water fan heaters**. It combines advanced features such as energy optimization, BMS integration, cloud capabilities, and Wi-Fi communication with a user-friendly interface and automated control. The result is a **smart, reliable, and energy-efficient** solution with **minimal maintenance**.



Fan control  
**PWM/0-10V**



**ON/OFF or 0-10V**  
water heater control



Temperature ctrl  
**built in control panel**



Door contact for  
**Day/Night** mode



**CLEAN INTERVAL**  
(Settable time period)



**ANTI-FREEZE**  
protection



**ModBUS RTU**  
included  
in standard



ModBUS TCP,  
BACnet IP as  
accessories



Extended  
functionalities  
and settings