

BASIC FEATURES


The **OH** flexible hose is designed for an easy connection of exchangers to the heating medium distributions. The hoses made of stainless steel and this is fitted with a thermal insulation.

- Temperature of medium conveyed: -20 up to +110 °C
- Maximum pressure: 1 MPa
- Lengths supplied: 300 and 500 mm
- Connection size: Union nuts DN 25 (G 1"), DN 20 (3/4")
- Number of pieces: 1



PRIMARY PARAMETERS

OH - 01

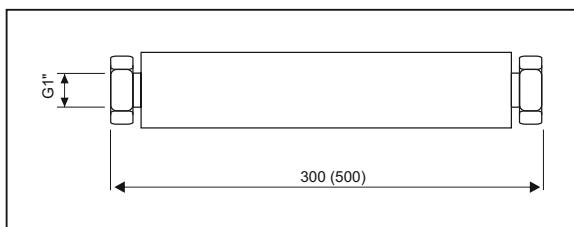

KEY TO CODING

OH - 01 - 1/1 - xxx

300, 500 – lengths in mm

1/1 – connection size G 1"

3-4 – connection size G 3/4"

01 – type 1"

02 – type 3/4"

OH – flexible hose



GRUNDEIGENSCHAFTEN


Der Flexible Schlauch **OH** ist zu einem einfachen Anschluss des Erhitzers zu den Verteilungen vom Heizmedium bestimmt. Der Schlauch ist aus Edelstahl und ist mit einer Wärmeisolation versehen.

- Temperatur des geförderten Mediums: -20 bis +110 °C
- maximaler Druck: 1 MPa
- angelieferte Längen: 300 und 500 mm
- Anschlussmaß: Überwurfmutter DN 25 (G 1"), DN 20 (3/4")
- Stückzahl: 1



WICHTIGSTE PARAMETER

OH - 02

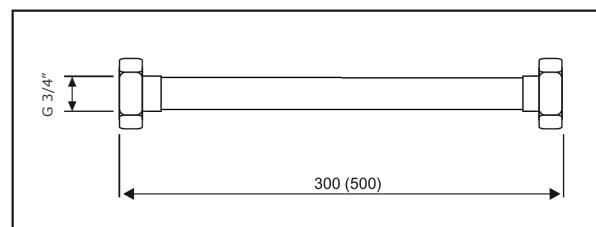

CODIERSCHLÜSSEL

OH - 01 - 1/1 - xxx

300, 500 – angelieferte Längen
in mm

1/1 – Anschlussverschraubung G1"

3-4 – Anschlussverschraubung

G 3/4"

01 – Typ 1"

02 – Typ 3/4"

OH – Der Flexible Schlauch